



FIMAKS LOADER

YOUR GLOBAL PARTNER





FIMAKS Loader is designed to increase the productivity of enterprises by reducing the need for increased work and time in major livestock, agriculture, construction, landscape and municipal enterprises.

With an average fuel consumption of 2 to 3 liters per hour, Fimaks Loader saves on labor and time and increases efficiency and profitability.

In addition to economy, tasks that are difficult to accomplish under normal conditions are solved easily and quickly with Fimaks Loader, which makes it a star of your enterprise.



Accomplish difficult tasks easily with Fimaks Loader

Fimaks Loader increases business productivity by saving time and energy



2.6 meters lifting height
800 kg lifting capacity
3 cylinders Perkins engine
33 HP/25 kW power
0-15 km/hour speed

33 HP STANDARD

LS 30



3.6 meters lifting height
1300 kg lifting capacity
4 cylinders Perkins engine
50 HP/37 kW power
0-20 km/hour speed

50 HP TELESCOPIC

LT 50



2.8 meters lifting height
1400 kg lifting capacity
4 cylinders Perkins engine
50 HP/37 kW power
0-20 km/hour speed

50 HP STANDARD

LS 50



3.6 meters lifting height
1400 kg lifting capacity
4 cylinders Perkins engine
60 HP/44 kW power
0-20 km/hour speed

60 HP TELESCOPIC

LT 60



2.8 meters lifting height
1500 kg lifting capacity
4 cylinders Perkins engines
60 HP/44 kW power
0-20 km/hour speed

60 HP STANDARD

LS 60



3 / 4 Cylinders

Powerful and economic with water cooled Perkins engines

THE LIFTING CAPACITY OF THE LOADERS VARIES AT MINIMUM AND MAXIMUM HEIGHTS



FIMAKS LOADER AGRICULTURAL USAGE

- Lifting and carrying round and square bales
- Stacking of bales in high places
- Removal and relocation of additives and factory feed
- Lifting and carrying heavy weights
- Lifting and carrying pallets
- Silage tilling, silage cutting and silage plucking
- Feed pushing and refreshing the feed
- Removal, collection and relocation of manure
- Cleaning and removing garbage
- Drilling and digging holes
- Cleaning of work area from the snow



FIMAKS LOADER PUBLIC USAGE

- Road cleaning
- Cleaning of roadside signs
- Cleaning tasks
- Mowing of branches and lawns
- Pit and grave excavation
- Getting rid of weeds
- Tree planting
- Snow plowing
- Snow blowing
- Salt spreading



FIMAKS LOADER CONSTRUCTION USAGE

- Transportation of heavy construction materials
- Pit digging and hole drilling
- Transport of water and other fluids
- Relocating materials to higher places
- Debris removal after demolition
- Cleaning work areas
- Plowing of snow and soil in working areas



FIMAKS LOADER LANDSCAPING USAGE

- Pit and hole drilling
- Carrying heavy materials
- Loading and taking down heavy materials
- Cleaning and plowing work areas
- Transportation of difficult to transport materials
- Tree planting
- Getting rid of wild weeds



Saving fuel with Fimaks Loader

Very economic to use with only 2-3 liters per hour of fuel consumption



22 Different attachments

Can be attached and de-attached in seconds

5 Different telescopic and standard models

Hidrostatic 4WD with water cooled Perkins engines

All-terrain tyres that are filled with water - glycol

Optional cabin with heating, optional air conditioner

Multi functional, easy to use joystick

Adjustable seat and adjustable front consol

Hour counter, tachometer, working lights, security lights

Fast hydraulic connection and Italian axles

2 Different gears, working and road

Fuel, heat and operational indicators on front consol





There are 22 different attachment specially designed for Fimaks Loader

- Bucket
- Square bale fork
- Bale grapple
- Pallet forks
- Silage tiller
- Silage cutter
- Feed refresher
- Silage and manure grapple
- Rubber scraper
- Hydraulic rubber scraper
- Extended bale fork (5.5 mt)
- Snow and soil plow
- Brush
- Sweeper
- Auger
- 4 in1 bucket
- Backhoe
- Excavator
- Hydraulic discharge bucket
- Wood grapple
- Snow blower
- Salt spreader



Multi functional Fimaks Loader

Overcome difficult works easily with 22 different attachments



CHARACTERISTICS	UNIT	LS 30	LS 50	LT 50	LS 60	LT 60
ENGINE		3 CYLINDERS	4 CYLINDERS	4 CYLINDERS	4 CYLINDERS TURBO	4 CYLINDERS TURBO
POWER	(hp/kW)	33/25	50/37	50/37	60/44	60/44
HEIGHT / HEIGHT WITH CABIN	(mm)	2400	2350 / 2560	2350 / 2560	2350 / 2560	2350 / 2560
LENGTH	(mm)	4100	5000	5400	5000	5400
WIDTH	(mm)	1350	1570	1570	1570	1570
WEIGHT WITHOUT ACCESSORIES	(kg)	2500	3450	3600	3600	3750
MAX LIFTING HEIGHT	(mm)	2600	2800	3600	2800	3600
MAX LIFTING CAPACITY	(kg)	800	1400	1300	1500	1400
LIFTING CAPACITY AT MAX HEIGHT	(kg)	600	1300	1000	1400	1150
SPEED	(km/hour)	0-15	0-20	0-20	0-20	0-20
FUEL TANK	(liter)	35	55	55	55	55
OIL TANK	(liter)	35	50	50	50	50
TELESCOPIC ARM		-	-	✓	-	✓
TYRES		26/12.00-12	425/55-17	425/55-17	425/55-17	425/55-17

Fimaks follows active product development policy. For this reason, Fimaks reserves the right to change models, options, specifications and all other information mentioned in the catalog without any prior notice. The photographs, images and illustrations in this catalog may show features and options which are not standard equipment.




FIMAKS YOUR GLOBAL PARTNER



FIMAKS Mustafakemalpaşa Factory
M.Kemalpaşa Organize Sanayi Bölgesi Cad. 5
No:2 16500 Mustafakemalpaşa/Bursa/TURKEY
T: +90 224 632 63 03
F: +90 224 632 63 04

FIMAKS Karacabey Factory
Bursa Yolu 2.Km DSI Karsisi
Karacabey/Bursa/TURKEY
T: +90 224 662 37 43
F: +90 224 662 37 47

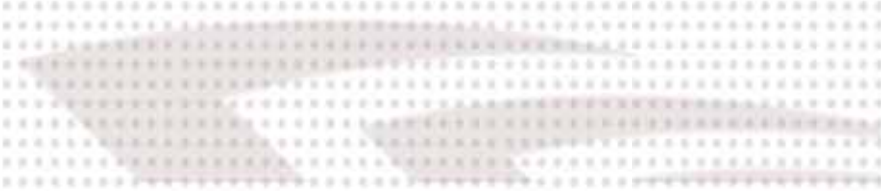

YOUR FIMAKS DEALER



Website



Loader



Youtube



Facebook



Call us

